




truflo[®]
pump grump

Industry's First All Plastic Combo
Gauge + Isolator-No Filling Required

'Truly Plug & Play'

... Always Watching

The 'Pump Grump' Pressure Gauge & Isolator Pulse and Surge Suppressor Perfect for Metering Pumps

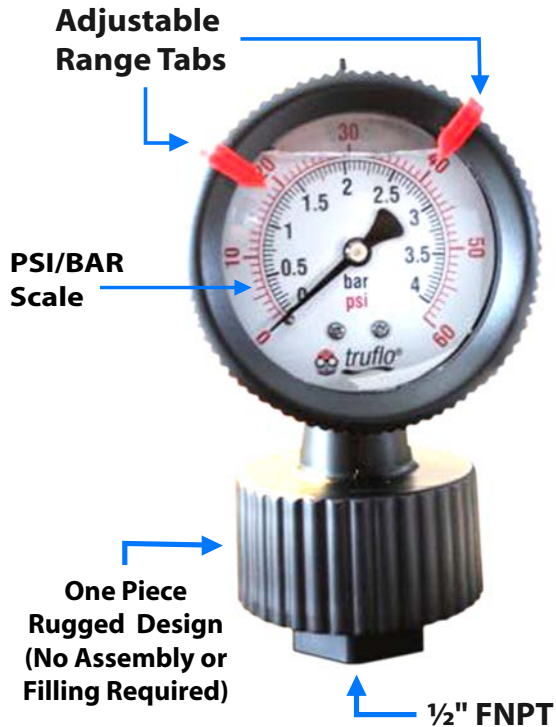

FEATURES

- All Plastic Plastic (Gauge + Isolator) Filled
- Heavy Duty Design; Simple to Install
- Completely Corrosion Resistant
- Red Markers Designed to Indicate Optimum Operating Range
- Extra Large Colored Display
- Reduces Pressure Surges caused by Water Hammer or Metering Pump Pulsations
- Highest Accuracy "In the" Industry 1.5%
- Factory Prefilled-Glycerin or Silicone
- No Filling Required
- One-Piece Molded Design (No Assembly)
- Suitable for Corrosive Media + Slurries

SPECIFICATION

Dial diameter	Large 2½" (Big Numbers-Clear Markers)
Mounting	Direct Mount, Bottom Connection FNPT ½"
Housing	One Piece Molded Design Polypro (No Assembly or Filling Required)
Lens	Options: Tough Impact glass
Dial	Red/Black Scale White Background, dial arc 270°
Measuring Principle	Bourdon Tube-SS316 (Non Wetted) Diaphragm (wetted part) - FPM (Standard)
Movement	SS316 (Non Wetted)
Gauge	Two (2) Red Adjustable Plastic Markers-Pressure Range Pointers fitted on the Bezel
Connection	Female thread 1/2" NPT
Filling	Options: Glycerin or Silicon Filled
Accuracy	±1.5% F.S.
Operating temperature	Max. Working Temp. +80°C
Pressure Range	Standard range 0-30 / 0-60 / 0-160 PSI (Second Scale: Bar) Other units available, e.g., bar, MPa, etc.






truflo[®]
pump grump

HOW TO ORDER

... Always Watching

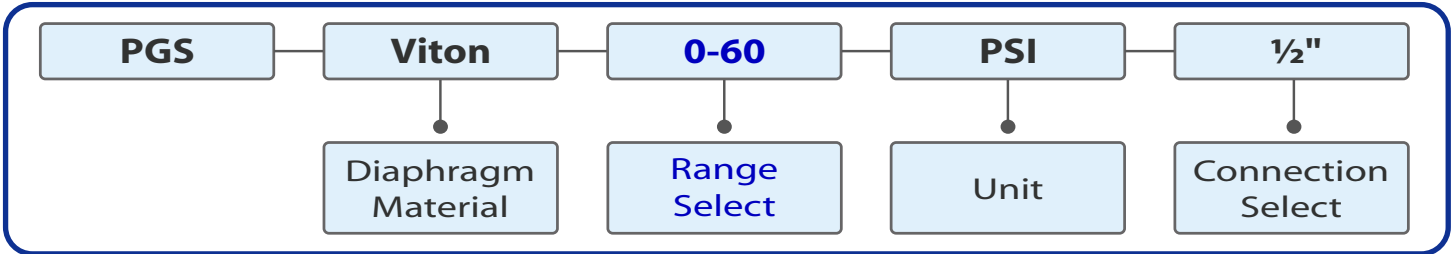

Pump grump Series

